

YUCATAN

SESTAVA COMPOSITION SIROVINSKI SASTAV ZUSAMMENSETZUNG COMPOSIZIONE		90% POLIESTER 10% VISKOZA 90% POLYESTER 10% VISCOSE 90% POLIESTERSKO VLAKNO 10% VISKOZA 90% POLYESTER 10% VISKOSE 90% POLIESTERE 10% VISCOSA	
ŠIRINA WIDTH ŠIRINA BREITE ALTEZZA	140 cm ±2%	TEŽA WEIGHT TEŽINA GEWICHT PESO	490 gr/m <sup>2</sup> ±5%

TEST	STANDARD	REZULTAT/RESULTS/REZULTAT/ERGENIS/ RISULTATI	
		OSNOVA/WARP/ OSNOVA/KETTE / ORDITO	VOTEK/WEFT/ POTKA/SCHUSS / TRAMA
RAZTEZNA TRDNOST TENSILE STRENGTH ČVRSTOČA NA RASTEZANJE ZUGFESTIGKEIT RESISTENZA ALLA TRAZIONE	EN ISO 13934-1	1733 N	1656 N
RAZTRŽNA TRDNOST TEAR STRENGTH ČVRSTOČA NA KIDANJE WEITERREISSFESTIGKEIT RESISTENZA ALLA LACERAZIONE	EN ISO 13937-3	87,9 N	119,5 N
DRSNOST NITI RESISTANCE TO SEAM SLIPPAGE OTPORNOST NA POMJERANJE /POMERANJE ŠAVA NAHTSCHIEBEWIDERSTAND RESISTENZA ALLO SCORRIMENTO DELLA CUCITURA	prEN ISO 13936-2 PRI/AT/KOD/BEI/A 180 N	2,8 mm	3,5 mm
OBSTOJNOST TKANINE NA DRGNJENJE ABRASION RESISTANCE POSTOJANOST TKANINE NA TRLJANJE SCHEUERBESTAENDIGKEIT RESISTENZA ALLA LACERAZIONE	DIN EN ISO 12947-1 DIN EN ISO 12947-2	>100.000 OBRATOV/REVS./OBRTAJA /TOUREN/GIRI	
PILING PILLING RESISTANCE PILING PILLBILDUNG RESISTENZA AL PILLING	EN ISO 12945-2 2.000 OBRATOV/REVS./OBRTAJA /SCHEUERTOUREN/GIRI	5	
OBSTOJNOST BARVE NA SVETLOBO COLOUR FASTNESS TO LIGHT POSTOJANOST BOJE NA SVJETLO/SVETLOST LICHTECHTHEIT RESISTENZA DEL COLORE ALLA LUCE	EN ISO 105-B02	4-5	
OBSTOJNOST BARVE NA DRGNJENJE COLOUR FASTNESS TO RUBBING POSTOJANOST BOJE NA TRLJANJE REIBECHTHEIT RESISTENZA DEL COLORE ALL'ABRASIONE	EN ISO 105-X12	SUHO/DRY/SUHO/ SUVO/TROCKEN / SECCO	MOKRO/WET/ MOKRO/NASS / UMIDO
		4	4-5
VSEBNOST AZO BARVIL CONTAIN OF AZO DYES SADRŽAJ AZO BOJA AZOFARBSTOFFE CONTENUTO DEI COLORANTI AZOICI	§ 64 LFGB 82.02-2,3,4	NI ZAZNANA NOT DETECTABLE NE SADRŽI NICHT NACHWEISBAR NON RILEVABILE	
VSEBNOST BARVIL, KI POVZROČAJO ALERGIJE ALERGY CAUSING DYES SADRŽAJ BOJA KOJE UZROKUJU ALERGIJE ALLERGISIERENDE FARBSTOFFE CONTENUTO DEI COLORANTI ALLERGENICI	DIN 54231:2005	NI ZAZNANA NOT DETECTABLE NE SADRŽI NICHT NACHWEISBAR NON RILEVABILE	
TEST NEGORLJIVOSTI FIRE RETARDANT TEST NEGORIVOSTI BRENNVERHALTEN IGNIFUGO	BS 5852 PART 1 Ignition source 0	PRESTAL PASSED PROŠAO UEBERSTANDEN PASSATO	

<b>ZAŠČITA TKANINE:</b> <b>FABRIC PROTECTION:</b> <b>ZAŠTITA TKANINE:</b> <b>STOFFSCHUTZ:</b> <b>PROTEZIONE TESSUTO:</b>	<b>VODOODBOJNI NANOS</b> <b>WATER REPELLENT</b> <b>VODOODBOJNI NANOS</b> <b>WASSERABWEISEND</b> <b>IDROREPELENTE</b>
--	--

<b>MED BARVNIMI PARTIJAMI SO MOŽNA ODSSTOPANJA V BARVI</b> <b>COLOUR DIFFERENCES BETWEEN DYING LOTS ARE POSSIBLE</b> <b>MOGUČA SU ODSSTOPANJA U BOJI KOD PROIZVODNJE</b> <b>FARBNIANSEN SIND MOEGlich</b> <b>TRA I VARI LOTTI POSSONO VERIFICARSI DELLE VARIAZIONI NEL COLORE.</b>
--






174



24



01

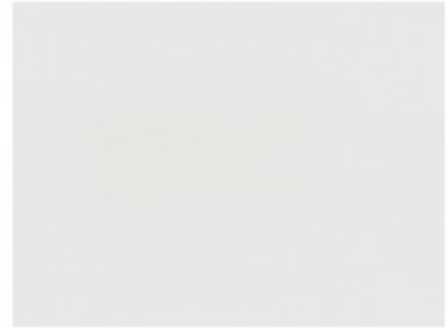

100



04



14




54



64



84

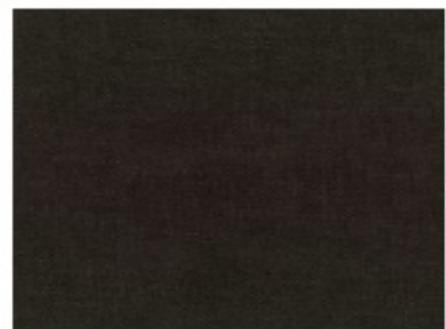


194




69



43

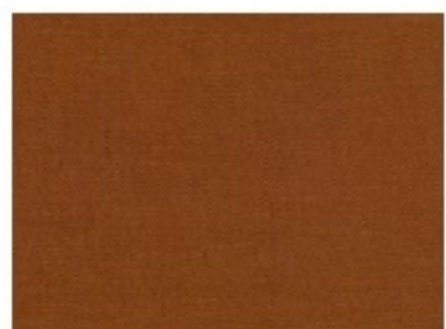


149

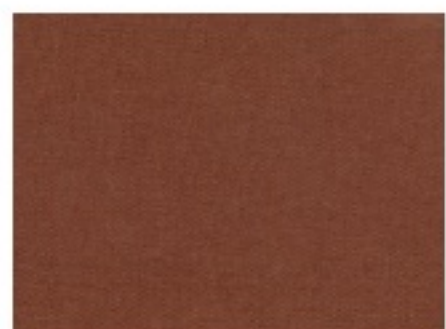


159



133

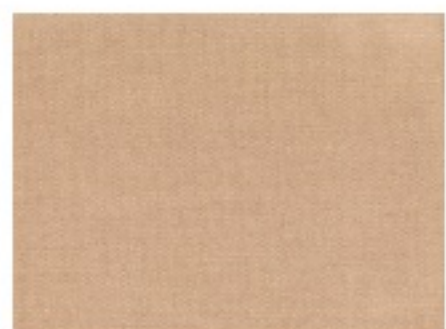


103

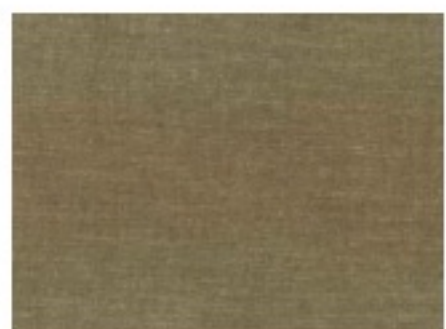

44



34

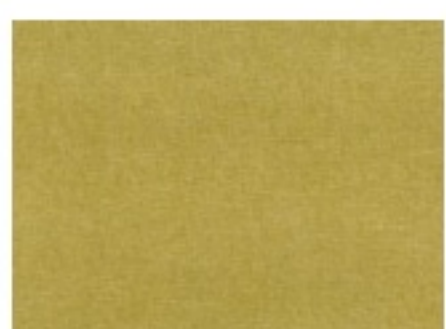


25




48




08

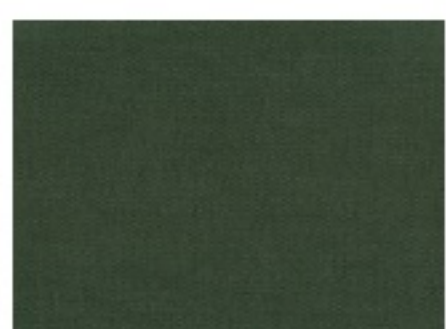


138

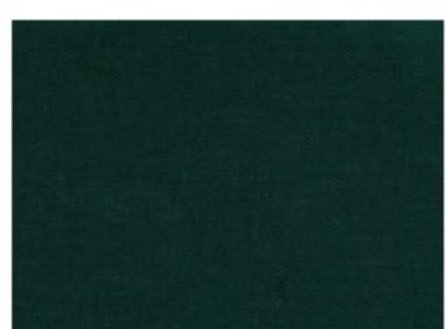

158

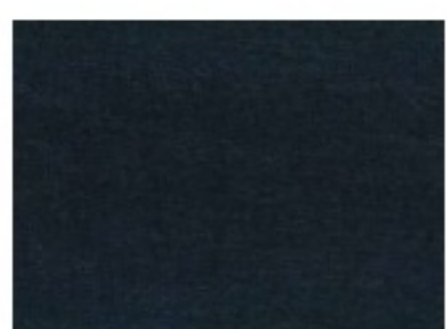

47

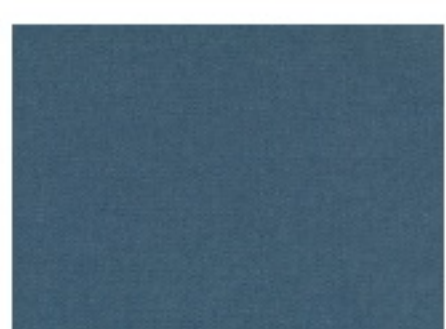


137



57



167

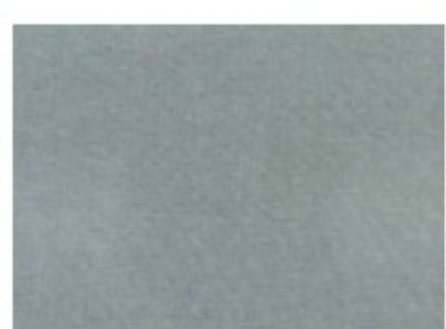

07



106



116




26



36



46

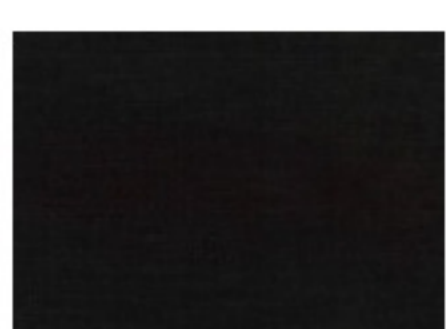

02